




## SMI2-M

### RS485 Multi-Color Display

### Firmware update guide

To update the firmware:

- Turn off the power to the device.
- Press and hold the service button.

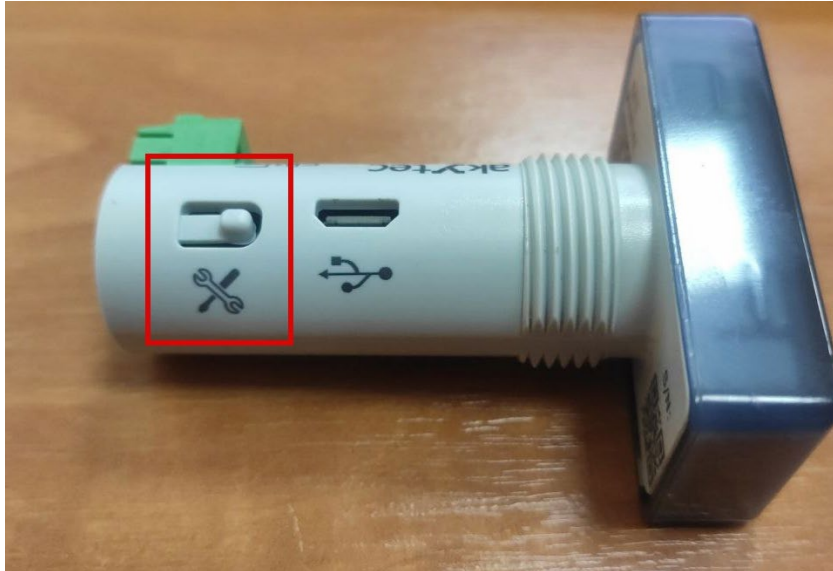


- Connect the device to a PC via USB.
- Release the service button when **LoAd** appears on the display.




- Run the firmware updater  
 Firmware\_embSoft\_smi2m\_v1.0.8\_EN.exe - For English firmware  
 Firmware\_embSoft\_smi2m\_v1.0.8\_DE.exe - For German firmware

Use the screenshots below to update the firmware.


1.

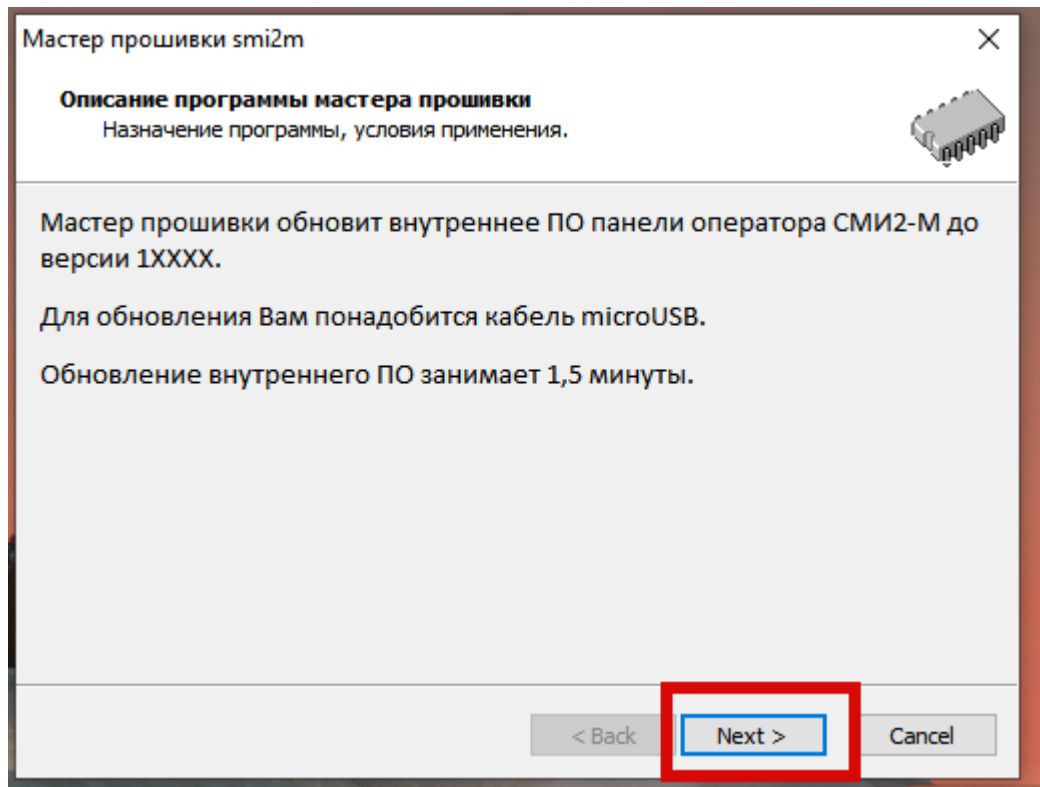


2.

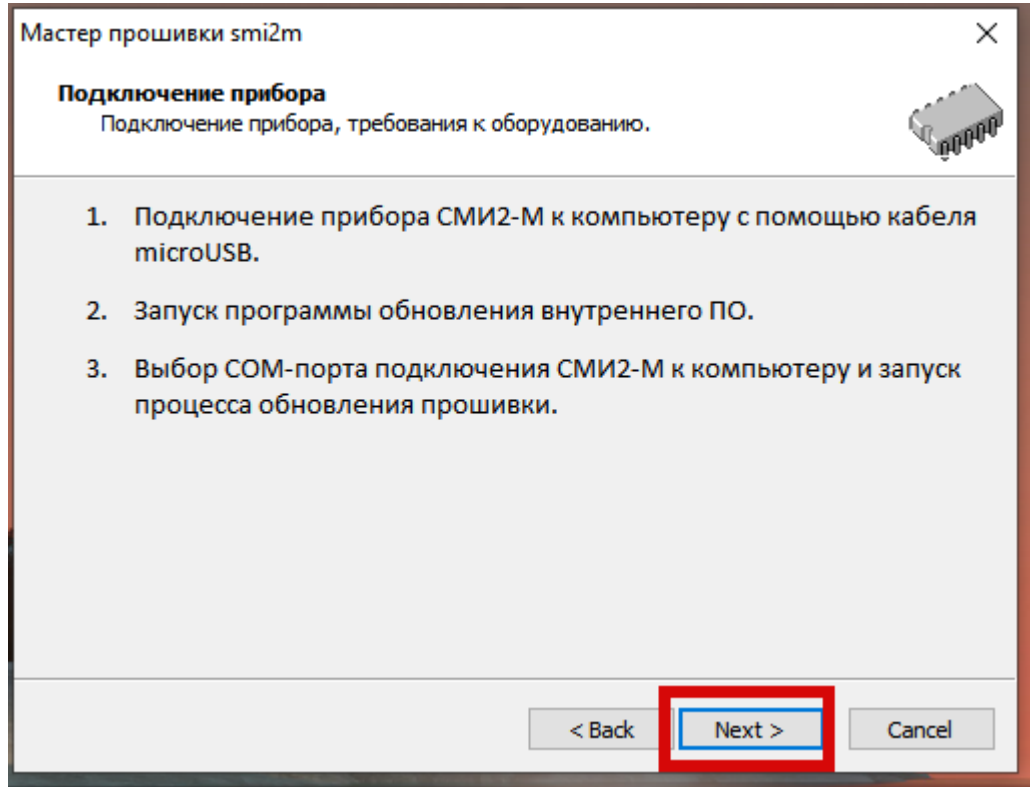


3. In the second line, set the port to which the device is connected.

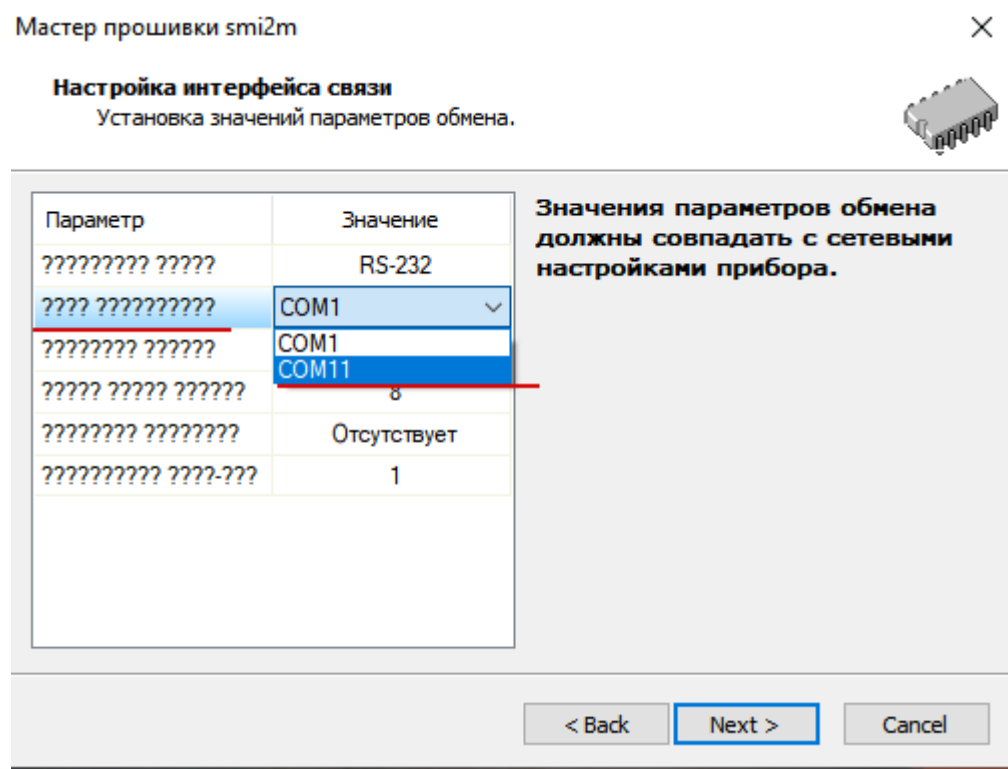


Port information can be found in the Device Manager window of your operating system.

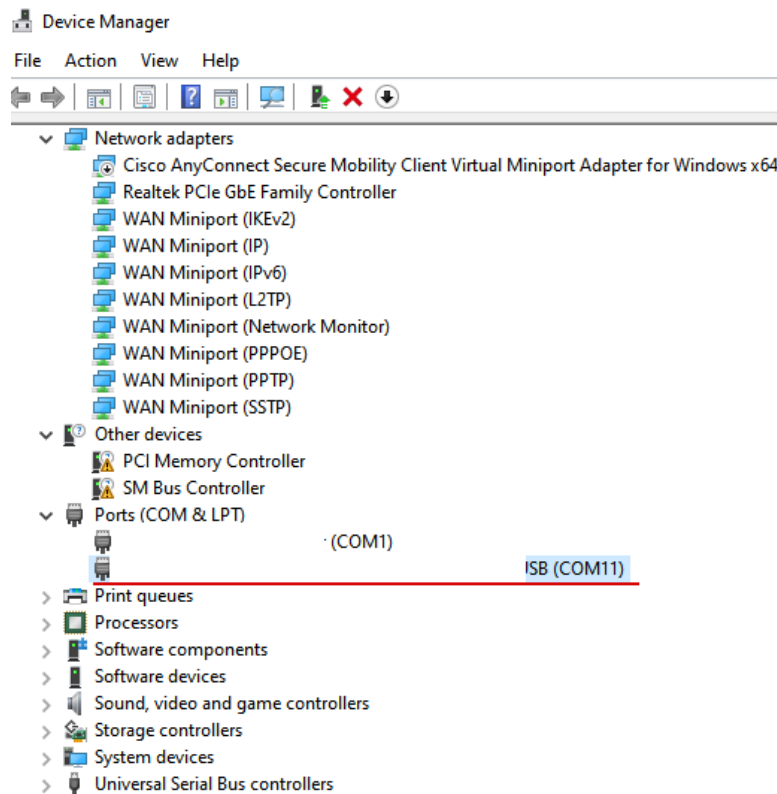


4.

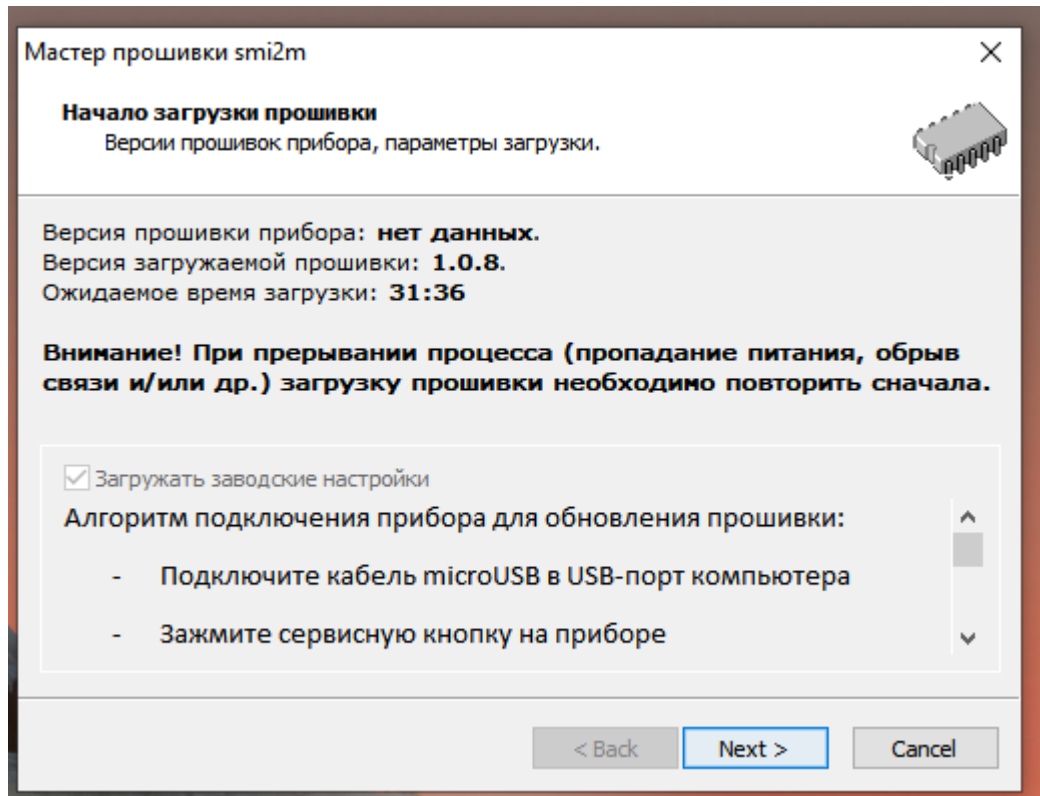

5.

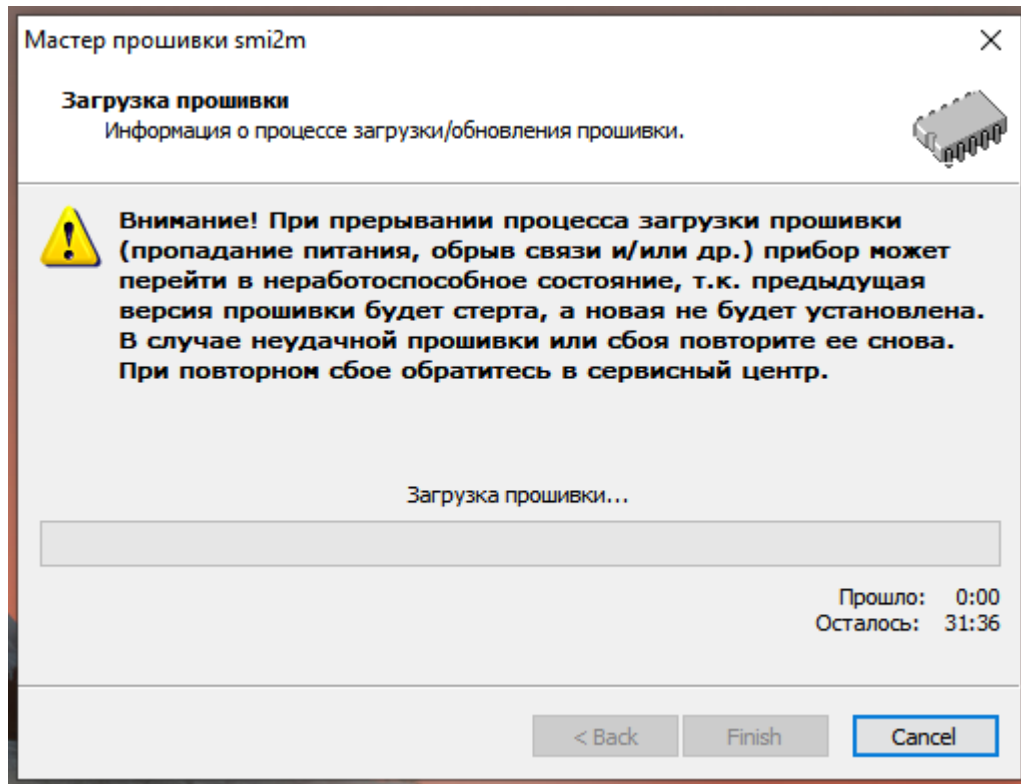

6. When the update is completed, you will see this window.  
To close the window, press the second active button.

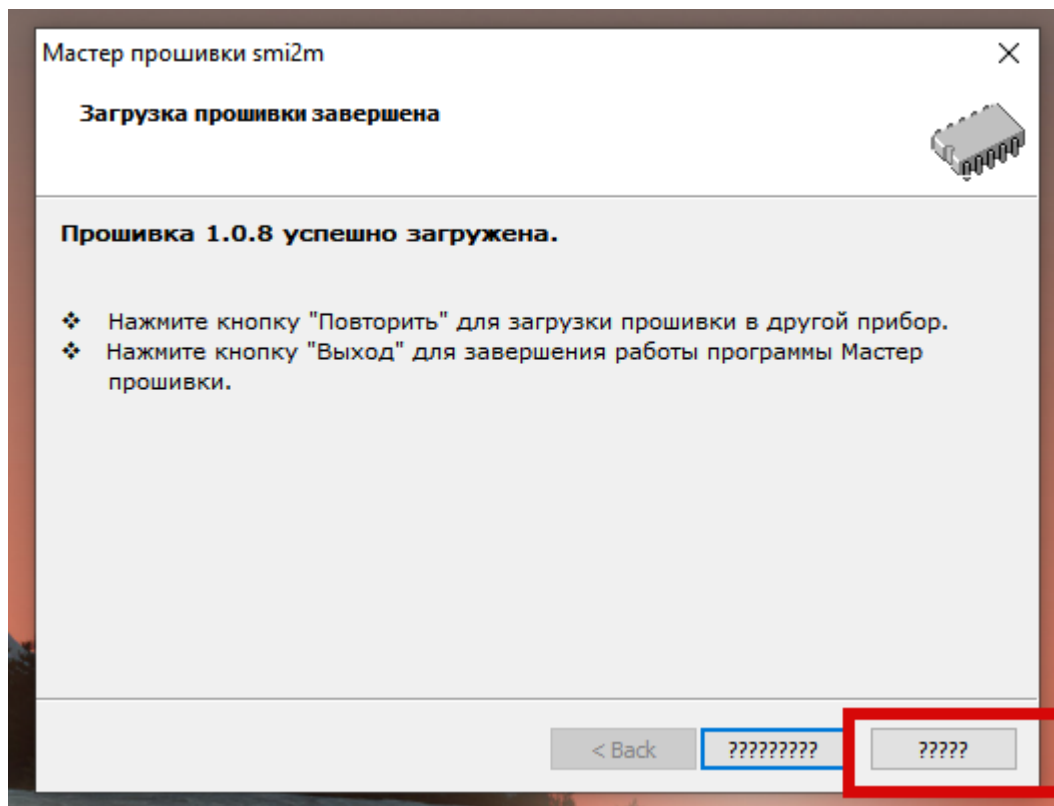

After rebooting the device, it can be used.